




IB/2004/052691



INVESTOR IN PEOPLE

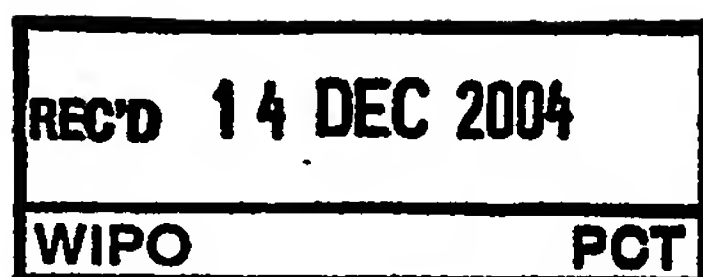

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed

Evans

Dated

18 October 2004

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

The
Patent
Office

09DEC03 E258057-1 00 879
POL/1700 0.00-032845.3

1/77

Request for grant of a patent

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE
L

- 9 DEC 2003 ✓

NEWPORT

0328459.3
The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

1. Your reference PHGB030216GBP
2. Patent application number
(The Patent Office will fill in this part) 09 DEC 2003 ✓ 0328459.3 ✓
3. Full name, address and postcode of the or of each applicant (underline all surnames)

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS
07419294001

THE NETHERLANDS
4. Title of the invention PRINTING
5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it)

Philips Intellectual Property & Standards
Cross Oak Lane
Redhill
Surrey RH1 5HA

08359655001
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority Application number	Date of filing
---------	-----------------------------	----------------
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day/month/year)
-------------------------------	---------------------------------
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d)) YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	8
Claims(s)	2 DL
Abstract	1
Drawings	6 ONLY

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents
Statement of inventorship and right
to grant of a patent (*Patents Form 7/77*)
Request for preliminary examination and
search (*Patents Form 9/77*)
Request for substantive examination
(*Patents Form 10/77*)
Any other documents
(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

D.J. Sharrock

Date

8 DEC 2003.

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 815399

D. J. SHARROCK

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered "Yes" Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

DESCRIPTION

PRINTING

5 The invention relates to a method of printing a patterned layer onto a substrate, to a printing machine bed, and to a printing machine.

TFTs are widely used in liquid crystal and other flat panel displays, including active matrix LCDs (AMLCDs), to control or sense the state of each pixel in the display.

10 A TFT structure is formed by successively providing layers of different materials. The layers may be patterned using photolithography. Alternatively, the layers may be patterned using a printed photoresist layer or the patterned layers themselves (or precursor materials thereof) may be directly printed onto the substrate. One suitable printing technique is now described with reference
15 to Figures 1 and 2.

Referring to Figure 1, apparatus 1 for fabricating a device, such as a thin-film transistor, includes printing means 2, for example a gravure offset printer, means 3 for supporting a layer structure 4, in this example a rigid stage, means 5 for moving the printing means 1 relative to the layer structure
20 4, in this example electrical motors, means 6 for detecting position of the printing means 1 relative to the layer structure 4, in this example an optical microscope and digital camera, and means 7 for controlling the printing means 2 and moving means 5, in this example a programmed general-purpose computer. Etching is carried out downstream.

25 The printing means 2 is arranged to print a number of patterned layers in succession. An offset printing process is used, and printing of each layer generally comprises three steps, as follows.

Referring to Figure 2(a), a first step comprises inking. A pattern carrying means 9, in this example a cliché in the form of a glass plate, includes
30 a plurality of grooves 10 which are arranged to define a pattern 11. Ink 12 is applied to the surface 13 of the image carrying means 9 and a filling means 14, which is often referred to as a doctor blade and which in this example is a

metal blade, is passed over the surface 13 of the pattern carrying means 9 so as to fill the grooves 10 with ink 12, and to clear ink 12 from regions 15 between the grooves 10.

Referring to Figure 2(b), a second step comprises transferring the pattern 11 from the pattern carrying means 9. Pattern transferring means 16, for example in the form of a large diameter cylindrical blanket comprising a polymer fixed around a metal roller, is applied to the surface 13 of the pattern carrying means 9 by rolling, so as to pick up some of the ink 12 in each groove 10. Typically, about half the ink is picked up. The pattern 11 is preserved on the pattern transferring means 15.

Referring to Figure 2(c), a third step comprises printing the pattern 11. The pattern transferring means 16 carrying ink 12 is applied, for example by rolling, to a surface 17 of the layer structure 4. Thus, ink 12 is transferred from the pattern transferring means 16 onto the surface 17 of the layer structure 4.

US-A-5,352,634 describes the printing of active matrix arrays.

US-A-6,576,378 describes the use of alignment marks in the manufacture of a large scale LCD device. US-A-5,407,763 discloses the use of shaped marks to allow alignment to be detected.

US-A-6,583,854 and US-A-6,146,796 disclose techniques for interfitting mask patterns on larger display devices.

The layer structure 4 used when manufacturing active matrix LCD screens for television sets or computing device displays, for example, is known as mother glass. It is usual for plural discrete arrays to be included on a single mother glass 4. In the field of AMLCD displays, the discrete arrays when finished can be termed 'displays', since each relates to one display. Conventionally a cliché used in printing on a mother glass is at least as large as the mother glass, and has the same number of arrays formed on it. For example, a cliché (and a mother glass) can be formed with sixteen arrays thereon. The clichés could be produced using a large sheet of glass.

There is a trend for mother glass size to increase. Mother glass of more than one metre square is known, which can be populated with tens of discrete arrays. However, as mother glass size increases, the extent of glass distortion

increases, which has a negative effect on the design process. In particular, misalignment of layers in an AMLCD can degrade performance and optical aperture, and this becomes more difficult to avoid as mother glass size increases. The effects are worse with printing of layers than they are with
5 some other layer patterning techniques, although printing has significant cost advantages associated with it. To aid alignment of the layers deposited onto a mother glass, a number of alignment marks tend to be provided both on the mother glass 4 and on the cliché 9. A typical arrangement is illustrated in Figure 3. Here a mother glass or cliché 20 (they both have the same general
10 layout) is shown with first to fourth alignment marks 21 to 24 and sixteen arrays 26, arranged four deep by four wide.

The position of alignment marks on the cliché 9 and on the mother glass 4 are detected, and the position of the cliché and mother glass relative to each other is adjusted as necessary electronically for the best match before printing
15 and then the pattern is transferred using the blanket 16. This helps to ensure that the arrays 26 are printed at the correct positions.

According to a first aspect of the invention, there is provided a method of printing a patterned layer onto a substrate, the method comprising: detecting the alignment of each of plural areas on the substrate; individually
20 positioning subbeds of a printing machine in accordance with the detected alignment; transferring material from clichés supported on the subbeds onto a common carrier; and transferring the material from the common carrier onto the substrate.

According to a second aspect of the invention, there is provided a
25 method of printing a patterned layer onto a first substrate, the method comprising: detecting the alignment of each of plural areas on a second substrate; individually positioning subbeds of a printing machine in accordance with the detected alignment; transferring material from clichés supported on the subbeds onto a common carrier; and transferring the material from the
30 common carrier onto the first substrate.

These methods can additionally comprise detecting the alignment of the clichés supported on the subbeds, and positioning the subbeds also in

accordance with the detected alignment of the clichés. This can allow for the position of the clichés on the subbeds to be compensated for.

In an embodiment, a method is used to print a layer of ink onto a mother glass substrate, although the invention has broader application than this.

5 The positioning step can comprise adjusting the position and/or orientation of the subbeds.

The invention also provides a substrate provided with a printed patterned layer through the above method, and also a device including a part of such a substrate.

10 A third aspect of the invention provides a printing machine bed comprising an array of subbeds individually alignable in a common plane.

The printing machine bed can for example comprise an array of four or more individually alignable subbeds. However, the printing machine bed may comprise two or three subbeds, or any other number, instead.

15 The printing machine bed preferably is usable in the printing of the components for liquid crystal displays, for example, active matrices .

The aligning of the subbeds can comprise adjusting the position and/or orientation of the subbeds.

20 A fourth aspect of the invention provides a printing machine including a bed as described above and a controller operable to control alignment of the subbeds.

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which:

25 Figure 1 is a schematic diagram of apparatus for fabricating a device using gravure offset printing;

Figures 2(a), 2(b) and 2(c) illustrate steps in a process implemented by the Figure 1 printing apparatus;

Figure 3 illustrates a typical cliché or mother glass layout;

30 Figure 4 is a flow diagram showing a method of forming a patterned layer according to one aspect of the invention;

Figure 5 schematically illustrates a printer used in the Figure 4 method and according to another aspect of the invention; and

Figure 6 is a flow diagram showing a method of forming a patterned layer according to an aspect of the invention.

5

A method of printing a patterned layer according to one aspect of the invention and utilising a printer bed according to another aspect will now be described with reference to Figure 4. Here the method begins at step 30 by detecting the position and alignment of arrays on a mother glass. By way of example, a mother glass 4 (see Figure 2(c)) is notionally divided into four areas, each area containing four arrays. Each of the four areas has alignment marks associated with it, so that the positions and alignment of each area, and thus the arrays within it, can be detected automatically. However, the mother glass 4 is retained as a single piece. The position and alignment detection can occur in any suitable manner.

15

At step 31, the position and alignment of clichés supported on subbeds on the bed of a printing machine (described below with reference to Figure 5) are detected electronically using alignment marks thereon. At step 32, the positions of the subbeds are adjusted according to the detected alignment and position of the areas on the mother glass and the positions and alignment of the clichés. The clichés are then inked at step 33. Alternatively, steps 32 and 33 could be reversed, i.e. the clichés could be inked before the subbed positions are adjusted. At step 34 ink is transferred from the clichés, supported on the printer subbeds, onto a blanket 16 (as in Figure 2(b)). Finally, at step 35, the material on the blanket 16 is transferred onto the mother glass (as in Figure 2(c)).

20

25

A printing machine 40 including a printing bed 41 according to one aspect of the invention is shown in Figure 5. The machine 40 is illustrated schematically, and it will be appreciated that it includes numerous unshown components. On the printing bed 41 are arranged first to fourth subbeds 42 to 45. Each subbed 42 to 45 is associated with a respective mechanical alignment mechanism shown at 46 to 49. Four clichés 50 to 53 are supported

30

on the printing bed 41, one cliché on each subbed 42-45. Each cliché 50 to 53 has its operative face uppermost. The clichés 50 to 53 are illustrated in plan view. The uppermost surfaces of the clichés 50 to 53 are formed in the same plane, allowing the blanket 16 (shown in Figure 2) to collect ink 12 (or other material) from all the clichés as it is passed over the uppermost surface, for subsequent printing onto the mother glass 4. The blanket 16 is wider than twice the relevant dimension of the clichés 50 to 53, assuming the clichés are all the same size.

The aligners 46 to 49 are each connected to a controller 54, which in turn is connected to receive alignment signals at an input 55. These alignment signals are provided by a controller (not shown) on the basis of the positions of alignment marks on the mother glass 4. The alignment signals fed to the controller 54 via the input 55 identify the alignment required of the subbeds 42 to 45. The controller 54 uses the alignment signals to provide suitable control signals to the aligners 46 to 49. The subbeds 42 to 45 are aligned by the aligners 46 to 49 in accordance with the required alignments. In this way, the clichés 50 to 53 become aligned with the arrays on the mother glass 4. This allows material 12 transferred from the clichés to the mother glass 4 via the blanket 16 to be more closely aligned with its desired alignment than is possible without individually alignable subbeds 42 to 45.

The printing machine 40 accordingly is able to compensate to a degree for distortions in the mother glass 4. The amount of compensation achievable depends on the number of subbeds 42 to 45 on the printing bed 41, which number determines the number of clichés 50 to 53. The printing bed 41 might be produced to have a number of subbeds equal to the number of arrays 26 on the mother glass 4.

The amount by which the subbeds 42 to 45 are required to be moved is dependent on the possible amount of distortion of the mother glass. With a mother glass of approximately one meter square and assuming that normal operating conditions apply, it may be that each subbed may be movable up to 30 microns in any direction. Of course, the alignment of the subbeds typically will involve their translation in x and y directions and also their rotation about

an axis perpendicular to the plane of the uppermost surface of the clichés 50 to 53. To allow movement to occur whilst allowing proper alignment, the clichés 50 to 53 are slightly smaller than the size of the corresponding area of the mother glass 4. The arrangement illustrated in Figure 5 is an exaggerated
5 example of how the clichés 50 to 53 might appear after alignment and before the blanket 16 is passed over them. Alignment is carried out in respect of each mother glass 4, since different mother glasses are likely to distort differently even under the same conditions.

This invention has utility in that some distortions in the mother glass can
10 be compensated for. Also, the clichés are significantly smaller than would otherwise be required, so can be significantly cheaper to produce.

Although in the above the printing process has been described in relation to a layer of ink, it will be appreciated that the process, and the apparatus, can be used in relation to any suitable material. For example, the
15 process and apparatus could be used to print a layer of precursor, silver particles in a binder to cite a non-limiting example, or any other substance, composition or mixture which is required to be printed.

Also, the invention is usable to print onto mother glass or any other substrate on which a printed layer is required. For example, an LCD cell
20 comprises an active plate and a passive plate with a liquid crystal material sandwiched between them. The active plate is formed from the mother glass making process which is partially described above. The passive plate is formed with features including a colour filter and a black grid. The black grid blocks any unmodulated light. Passive plates are not temperature cycled as
25 much as active plates, so they tend to experience less distortion. The features on the passive plate are positioned so that after coupling they are aligned with the appropriate feature on the active plate. Coupling of active and passive plates to make displays often takes place before the mother glass plates are cut into individual cells. In this case, care has to be taken that the match is
30 correct for all arrays to be made from the plates.

A method of making passive plates is now described with reference to Figures 2, 5 and 6.

In Figure 6, the process begins at step 60 by electronically detecting alignment of the areas (each containing one or more arrays) on a finished active mother glass. At step 61, the position and alignment of passive plate black grid clichés 50 to 53 supported on subbeds 42 to 45 on the bed 41 of the printing machine 40 (see Figure 5) are detected electronically using alignment marks thereon. At step 62, the positions of the subbeds are adjusted according to the detected alignment and position of the areas on the finished active mother glass and the positions and alignment of the clichés. The clichés are then inked at step 63. Alternatively, steps 62 and 63 could be reversed, i.e. the clichés could be inked before the subbed positions are adjusted. At step 64 ink is transferred from the clichés 50 to 53, supported on the printer subbeds 42 to 45, onto a blanket 16 (see Figure 2(b)). Finally, at step 65, the material on the blanket 16 is transferred onto the passive plate glass (as in Figure 2(c)). This provides a passive plate glass with black grid inking aligned with the arrays on the mother glass with which the passive plate is to be used. The same process can be used to apply colour filter to the passive plate glass.

This process allows a passive plate to be made to match the specific active plate with which it is to be coupled, and to compensate for the distortions within that plate.

From reading the present disclosure, other variations and modifications will be apparent to persons skilled in the art. Such variations and modifications may involve equivalent and other features which are already known in the art, and which may be used instead of or in addition to features already described herein.

Although Claims have been formulated in this Application to particular combinations of features, it should be understood that the scope of the disclosure of the present invention also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any Claim and whether or not it mitigates any or all of the same technical problems as does the present invention.

CLAIMS

1. A method of printing a patterned layer onto a substrate (4), the method comprising:

- 5 detecting (30) the alignment of each of plural areas on the substrate;
individually positioning (32) subbeds (42-45) of a printing machine (40)
in accordance with the detected alignment;
transferring (34) material from clichés supported on the subbeds onto a
common carrier (16); and
10 transferring (35) the material from the common carrier (16) onto the
substrate.

2. A method of printing a patterned layer onto a first substrate (4), the method comprising:

- 15 detecting (60) the alignment of each of plural areas on a second
substrate;
individually positioning (61) subbeds (42-45) of a printing machine (40)
in accordance with the detected alignment;
transferring (62) material from clichés (50-53) supported on the subbeds
20 onto a common carrier (16); and
transferring (65) the material from the common carrier (16) onto the first
substrate.

3. A method as claimed in claim 1 or claim 2, comprising detecting
25 (31; 61) the alignment of the clichés supported on the subbeds, and
positioning the subbeds also in accordance with the detected alignment of the
clichés.

4. A substrate provided with a printed patterned layer through the
30 method of any of claims 1 to 3.

5. A device including a part of a substrate according to claim 4.

6. A printing machine bed (41) comprising an array of subbeds (42-45) individually alignable in a common plane.

5 7. A bed as claimed in claim 6, comprising an array of four or more individually alignable subbeds.

8. A printing machine (40) including a bed as claimed in claim 6 or claim 7 and a controller (54) operable to control alignment of the subbeds.

10

9. A method of printing a patterned layer on a substrate substantially as described herein with reference to Figures 4 to 6 of the accompanying Drawings.

15 10. A substrate substantially as described herein with reference to Figures 4 to 6 of the accompanying Drawings.

11. A device substantially as described herein with reference to Figures 4 to 6 of the accompanying Drawings.

20

12. A printing machine bed substantially as described herein with reference to Figures 4 to 6 of the accompanying Drawings.

13. A printing machine substantially as described herein with
25 reference to Figures 4 to 6 of the accompanying Drawings.

ABSTRACT**PRINTING**

5 A method of printing a patterned layer comprises (step 31 in Figure 4) detecting the position and alignment of clichés supported on subbeds on the bed of a printing machine (see Figure 5) using alignment marks thereon. The positions of the subbeds are adjusted according to the detected alignment and position of the areas of the mother glass and the positions and alignment of
10 the clichés (step 32 in Figure 4). The clichés are then inked (step 33 in Figure 4). Alternatively, steps 32 and 33 could be reversed. Ink is transferred (step 34 in Figure 4) from the clichés, supported on the printer subbeds, onto a blanket 16 (see Figure 2(b)). The material on the blanket 16 is transferred (step 35, Figure 4) onto the mother glass (as in Figure 2(c)). A novel printing
15 machine bed (41, Figure 5) comprises an array of subbeds (42-45 in Figure 5) individually alignable in a common plane.

[Figure 5]



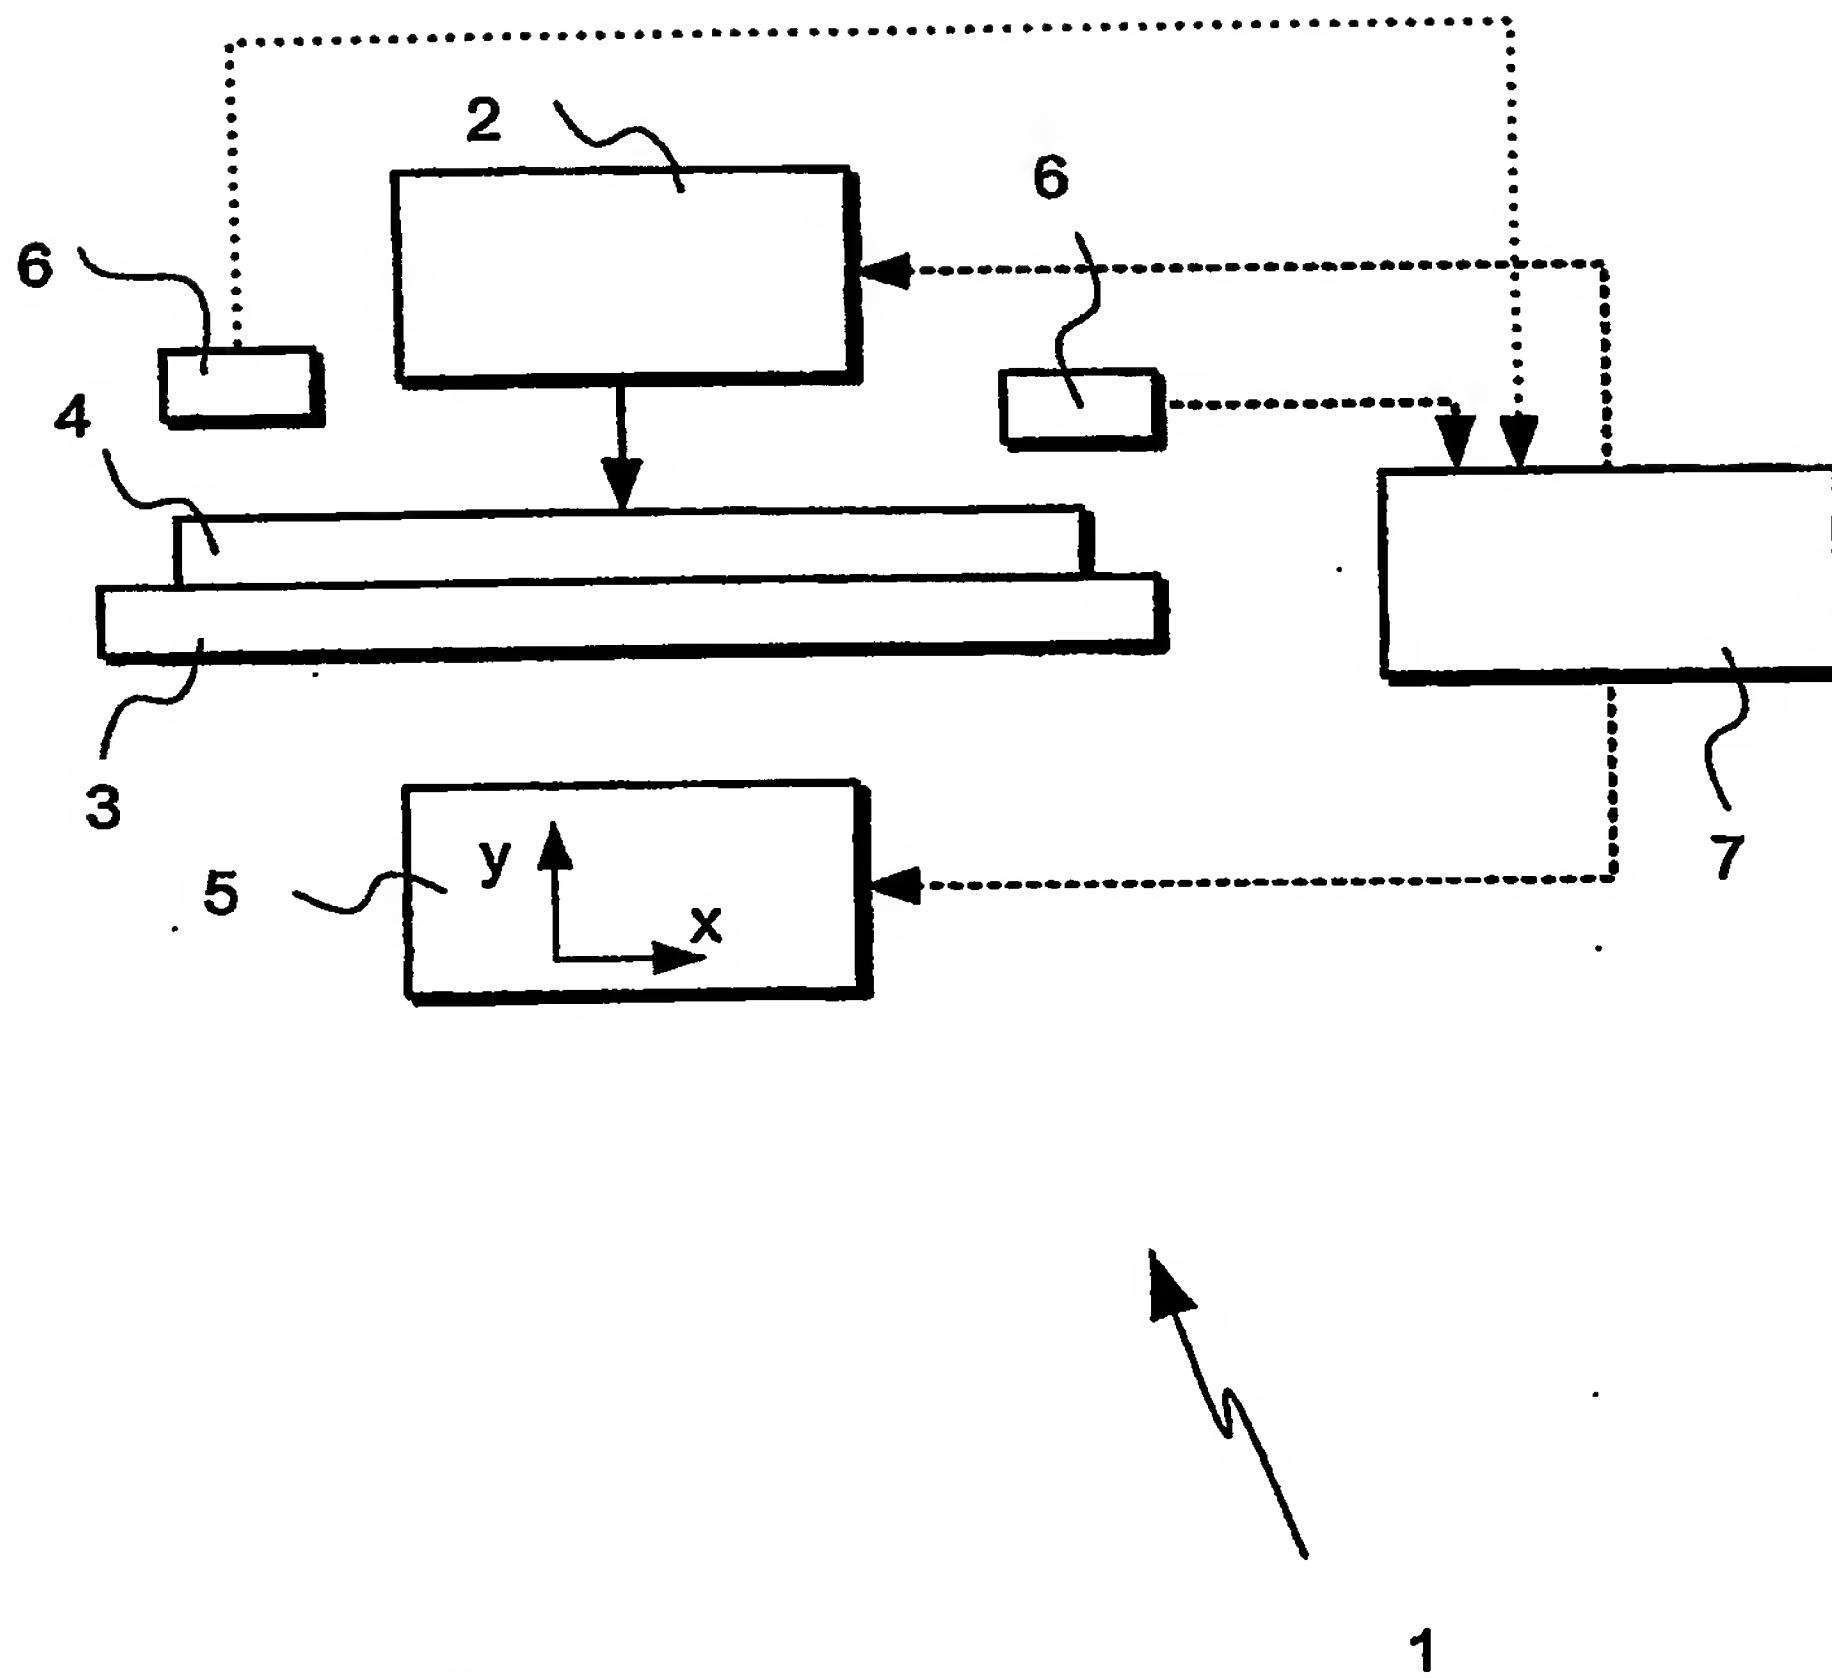



Figure 1

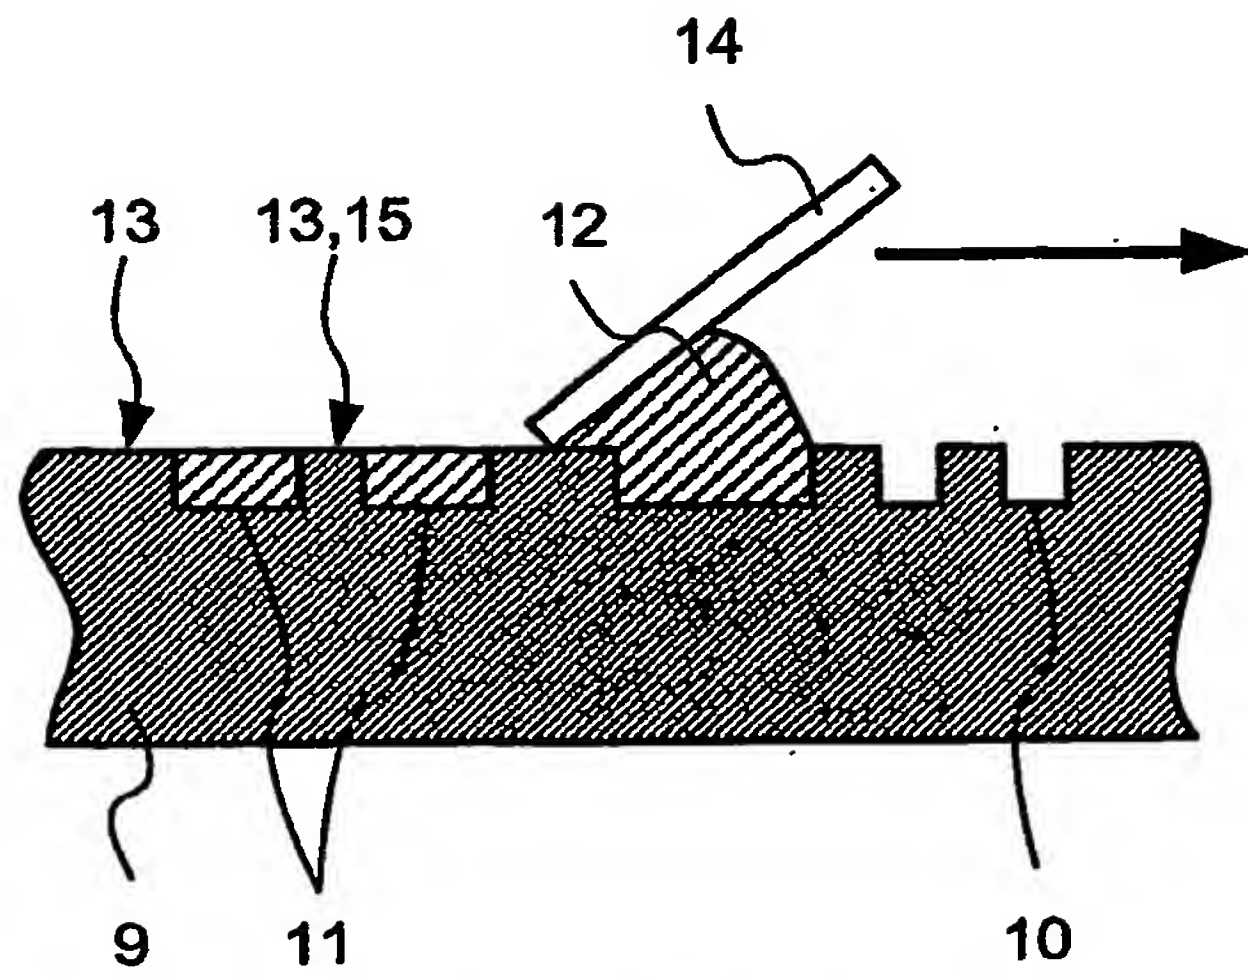

(a)

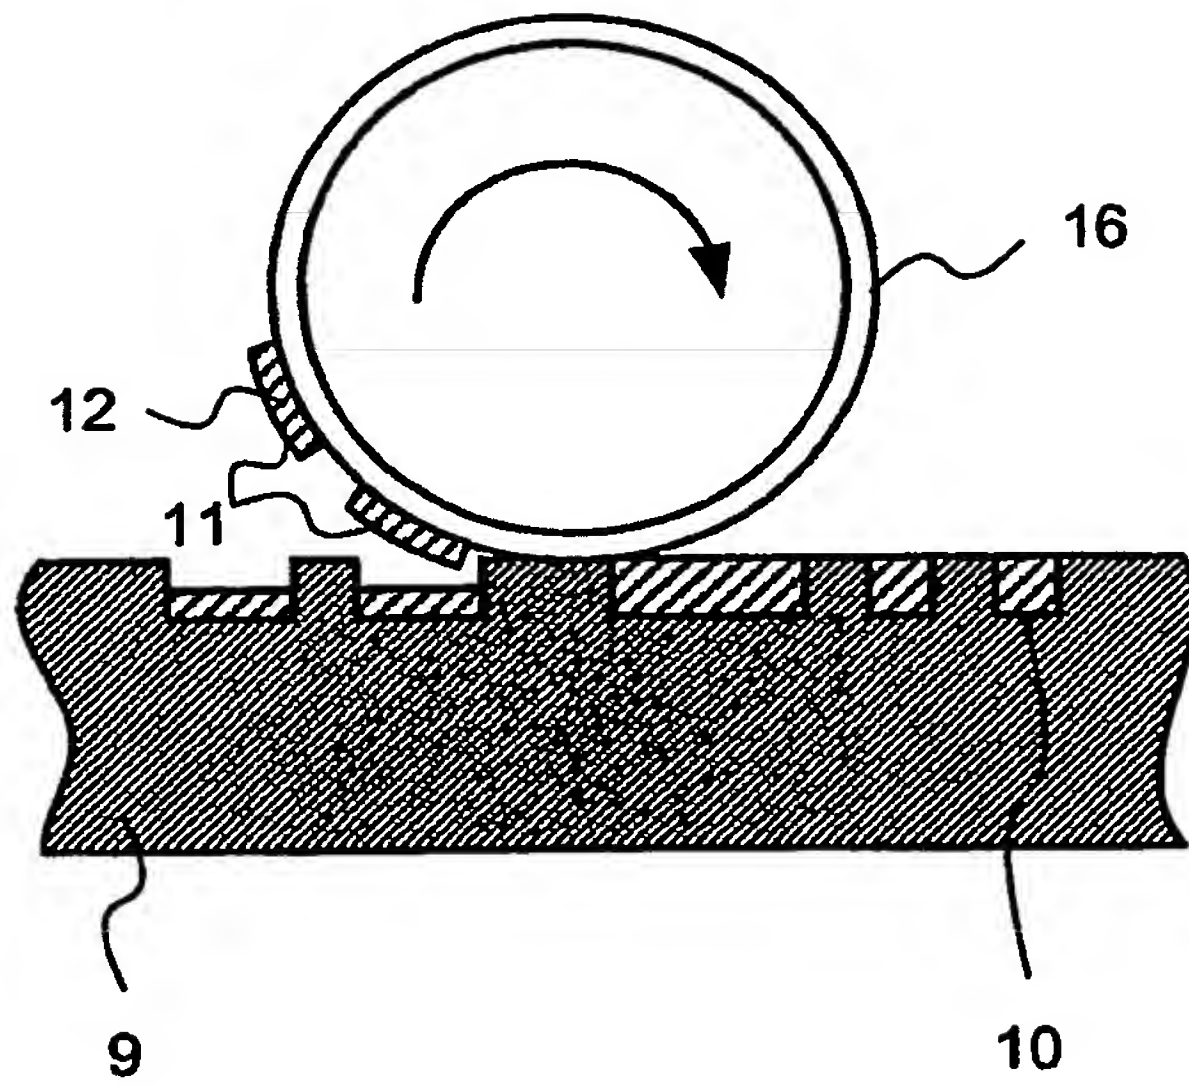

(b)

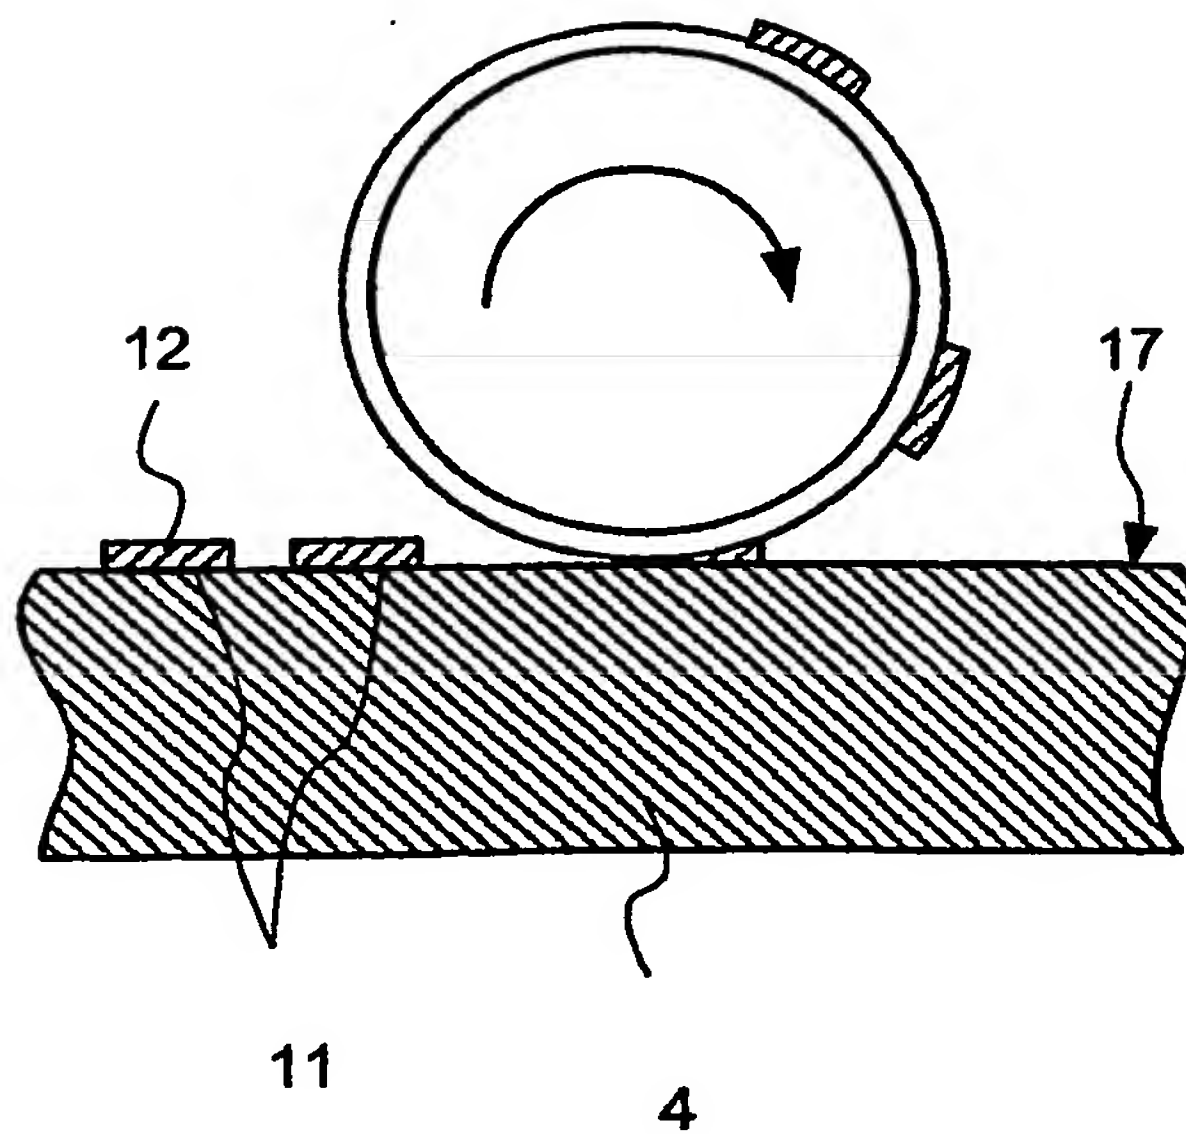

(c)

Figure 2

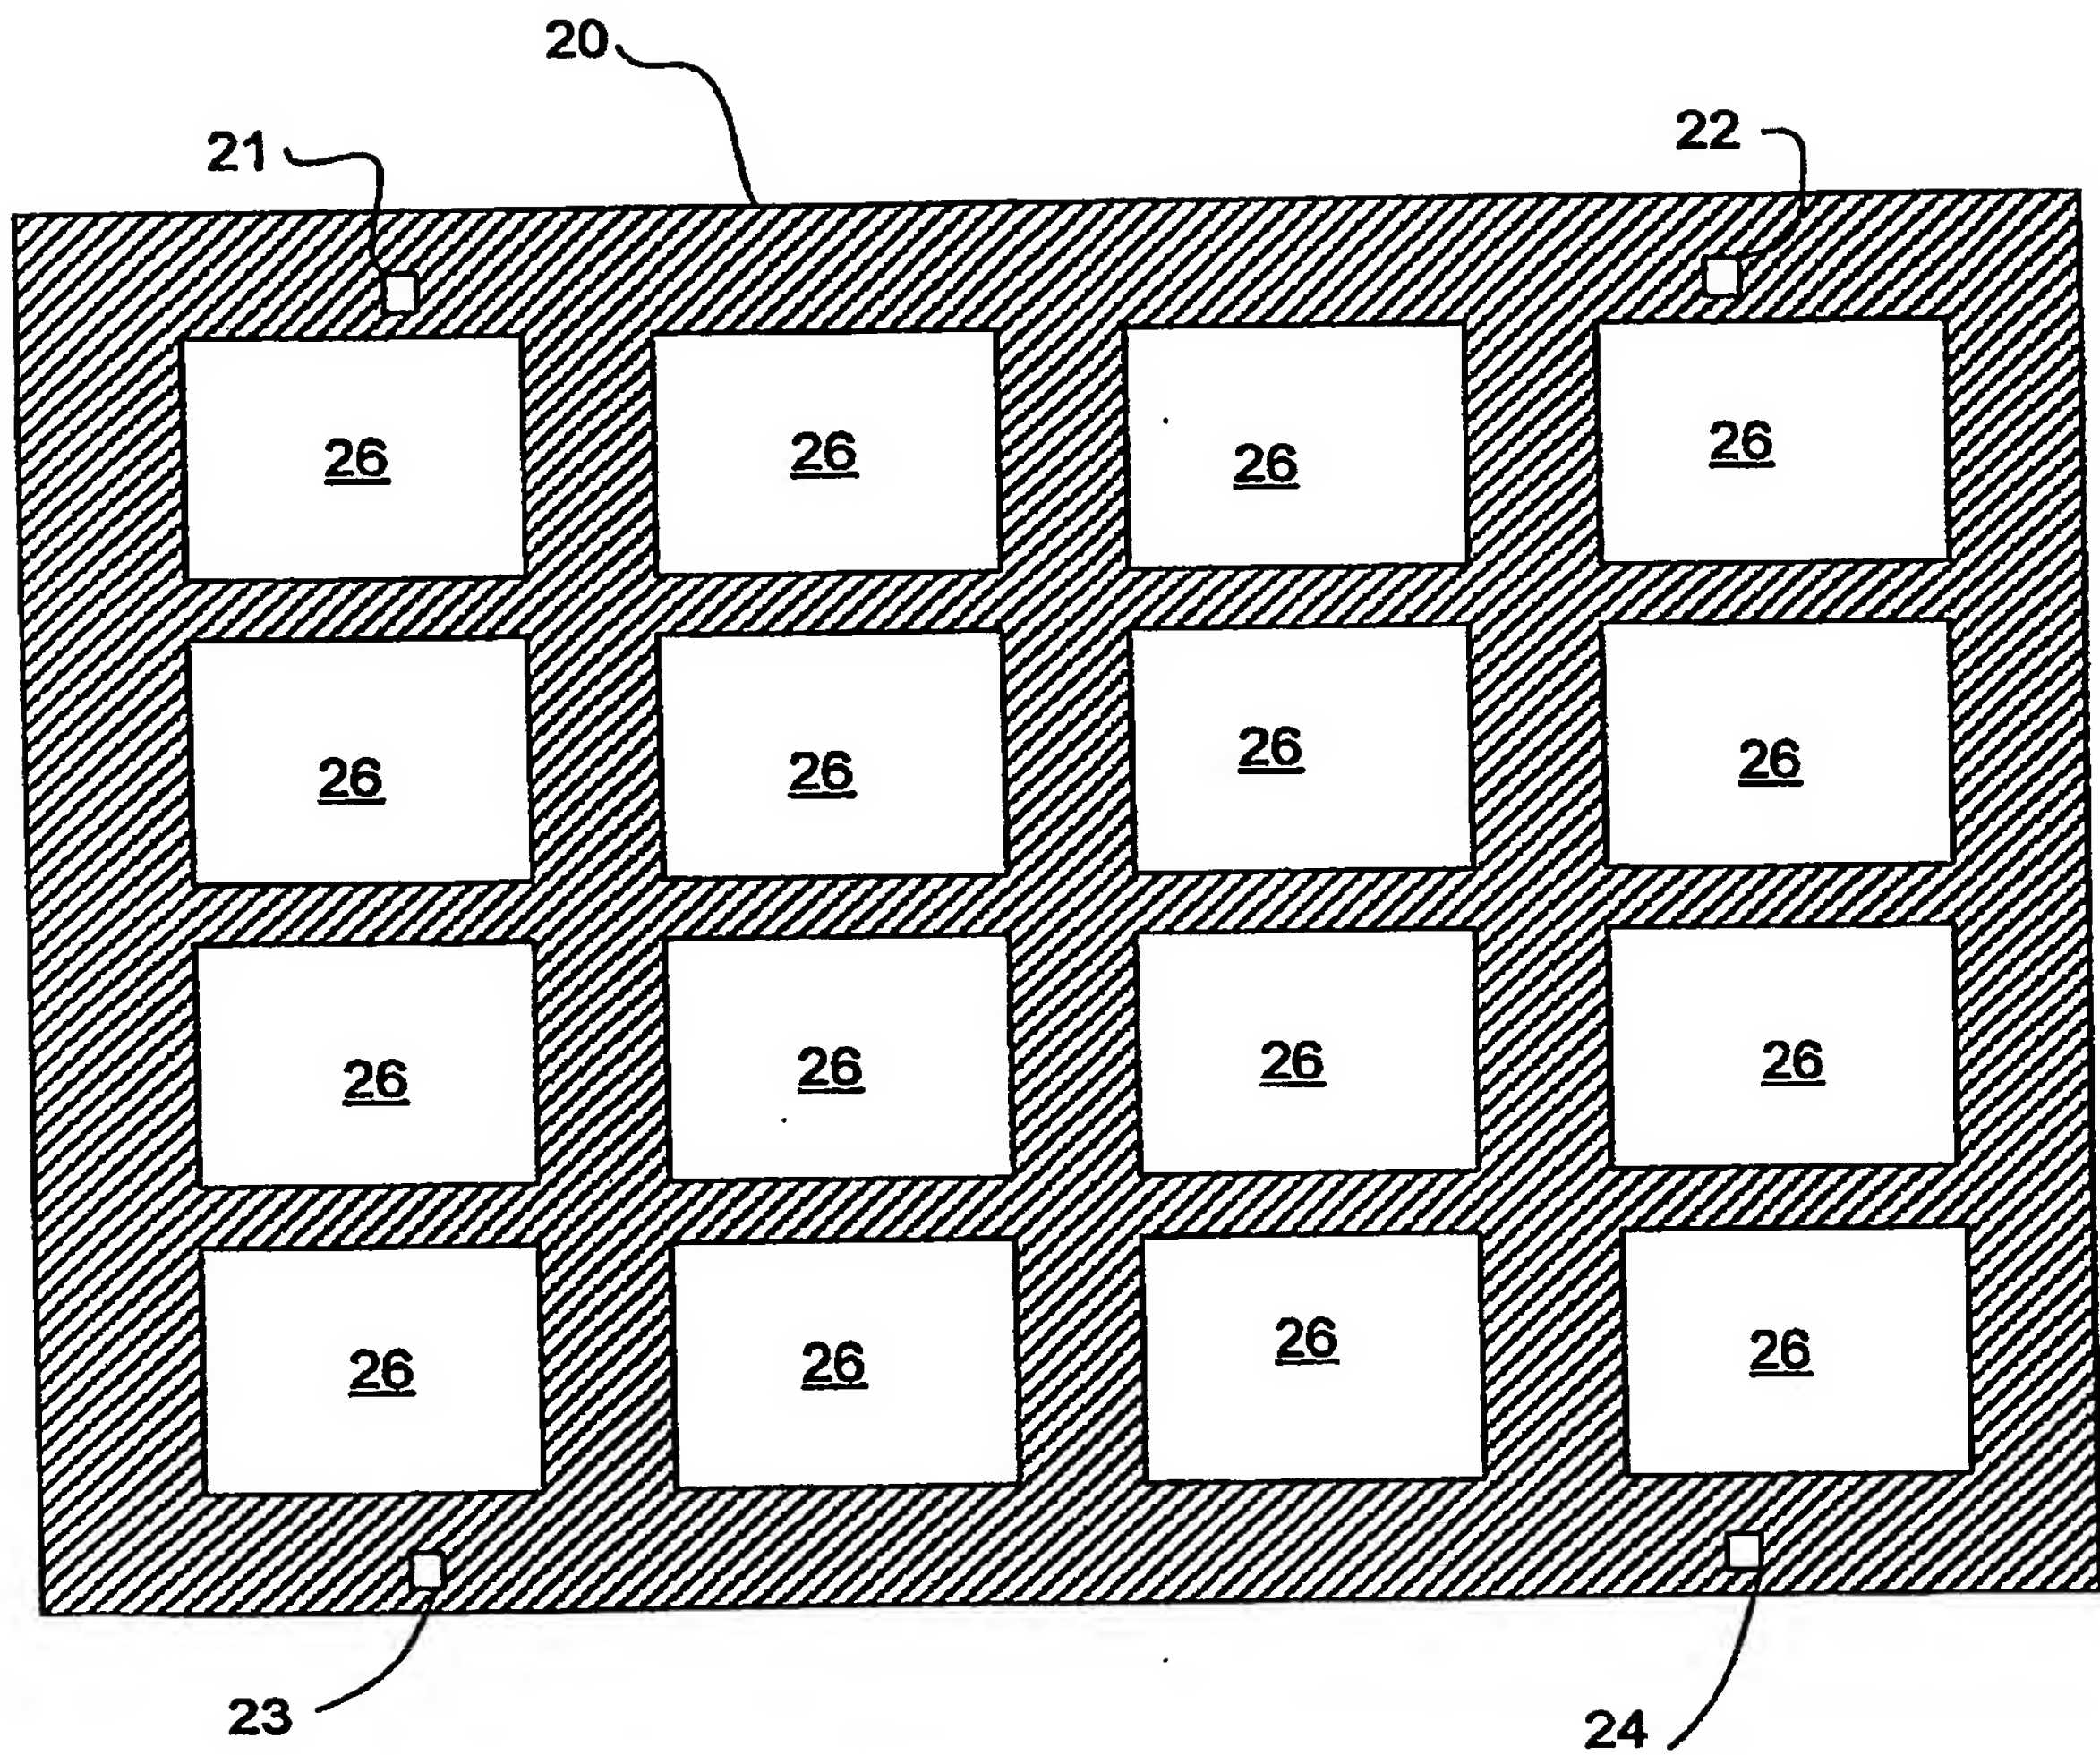


Figure 3

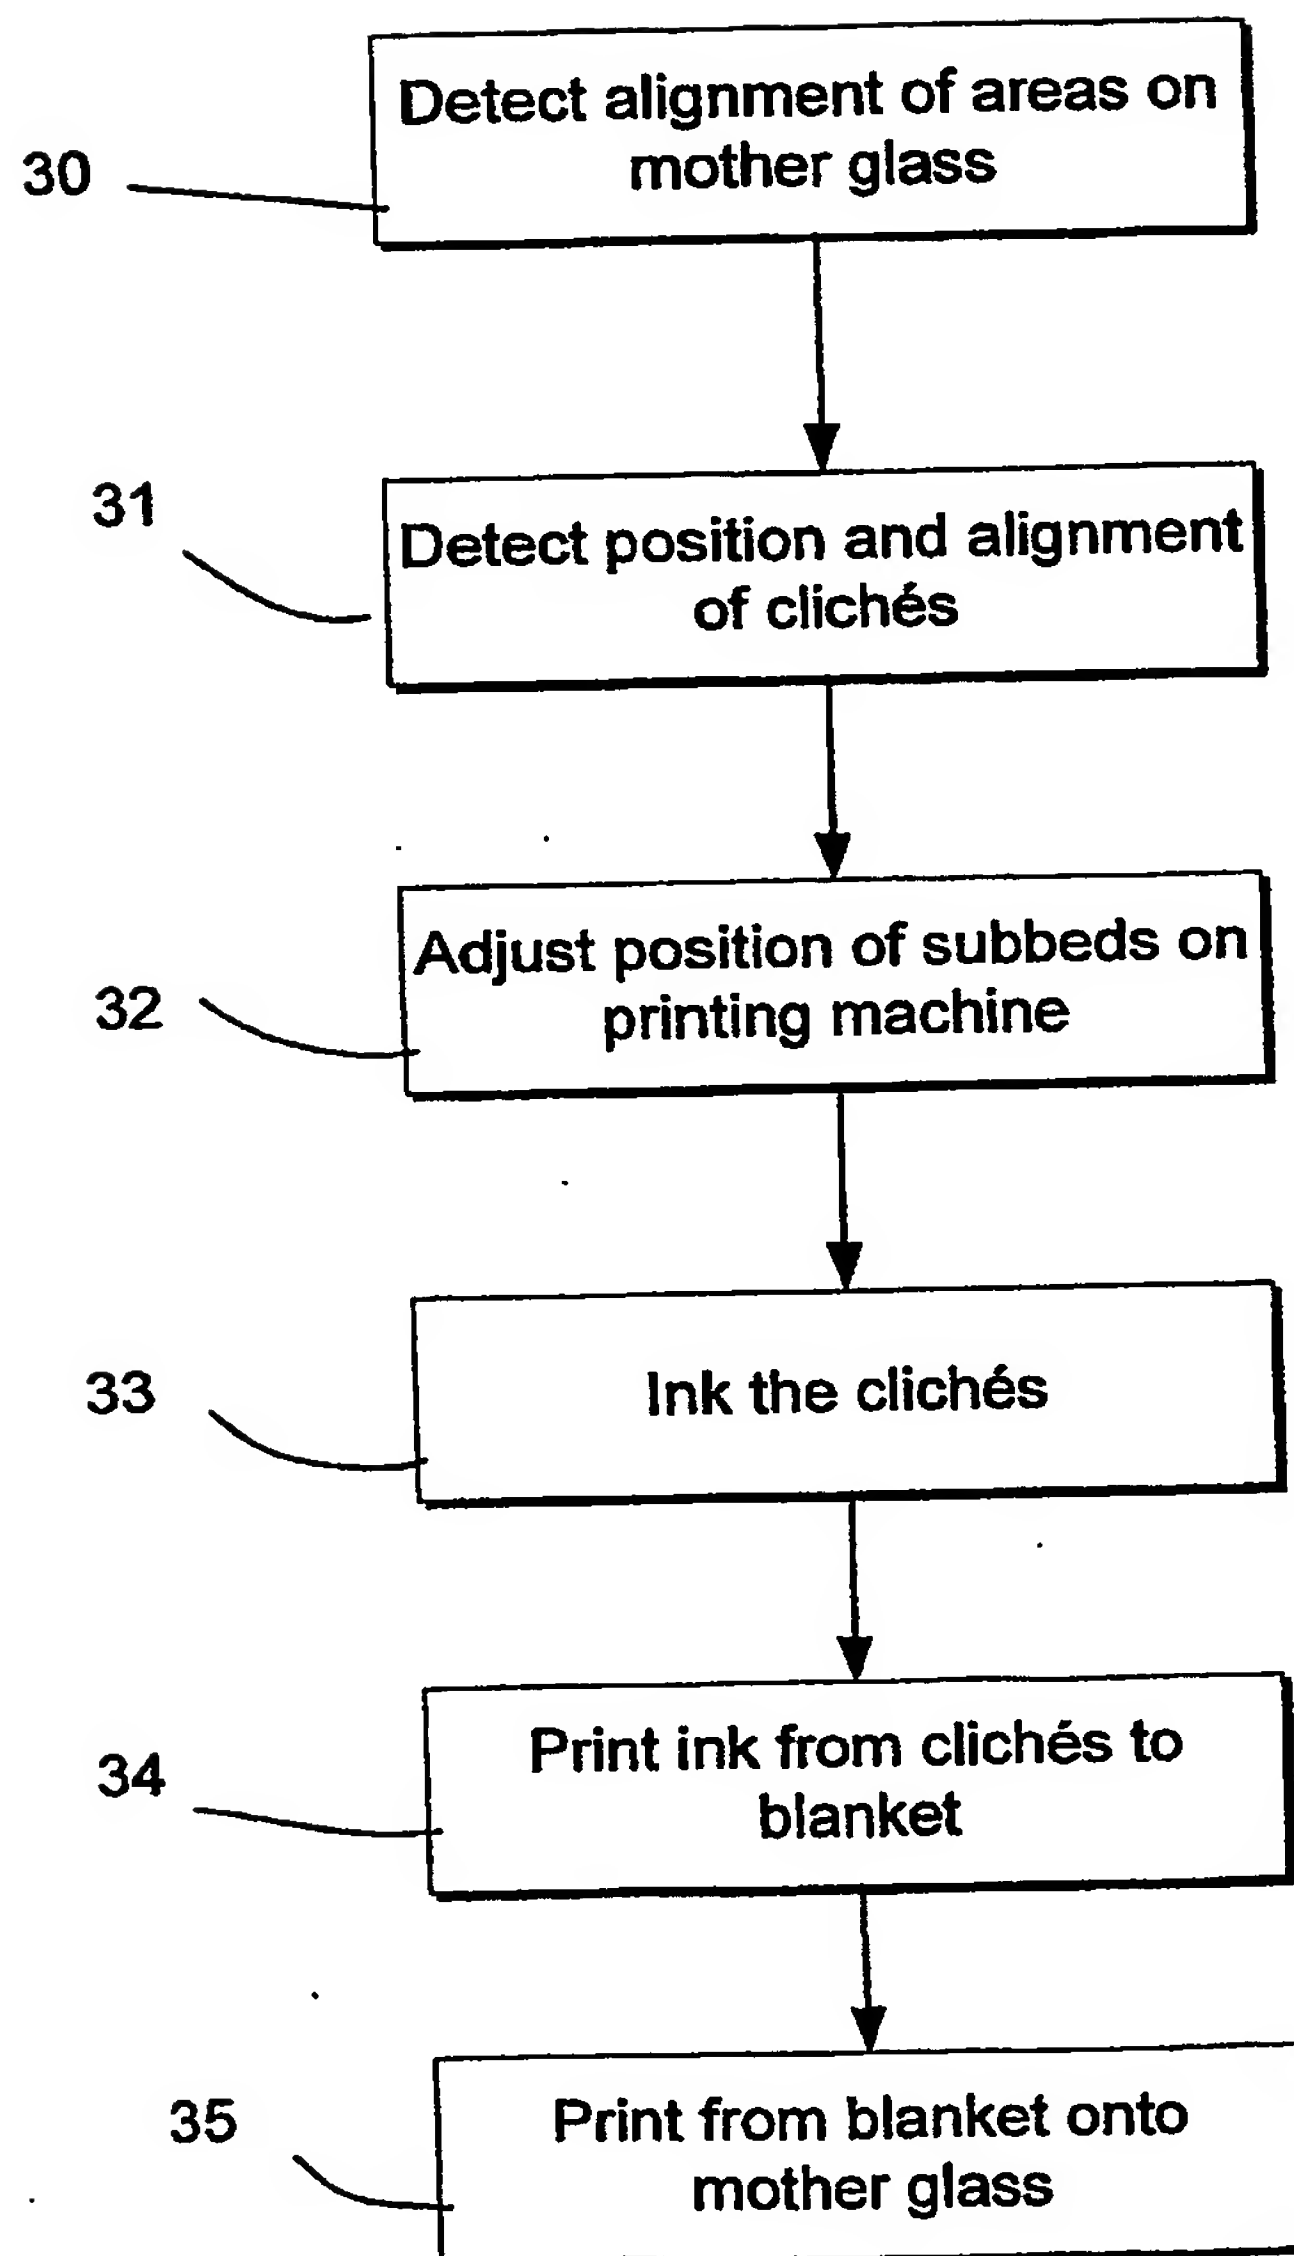


Figure 4

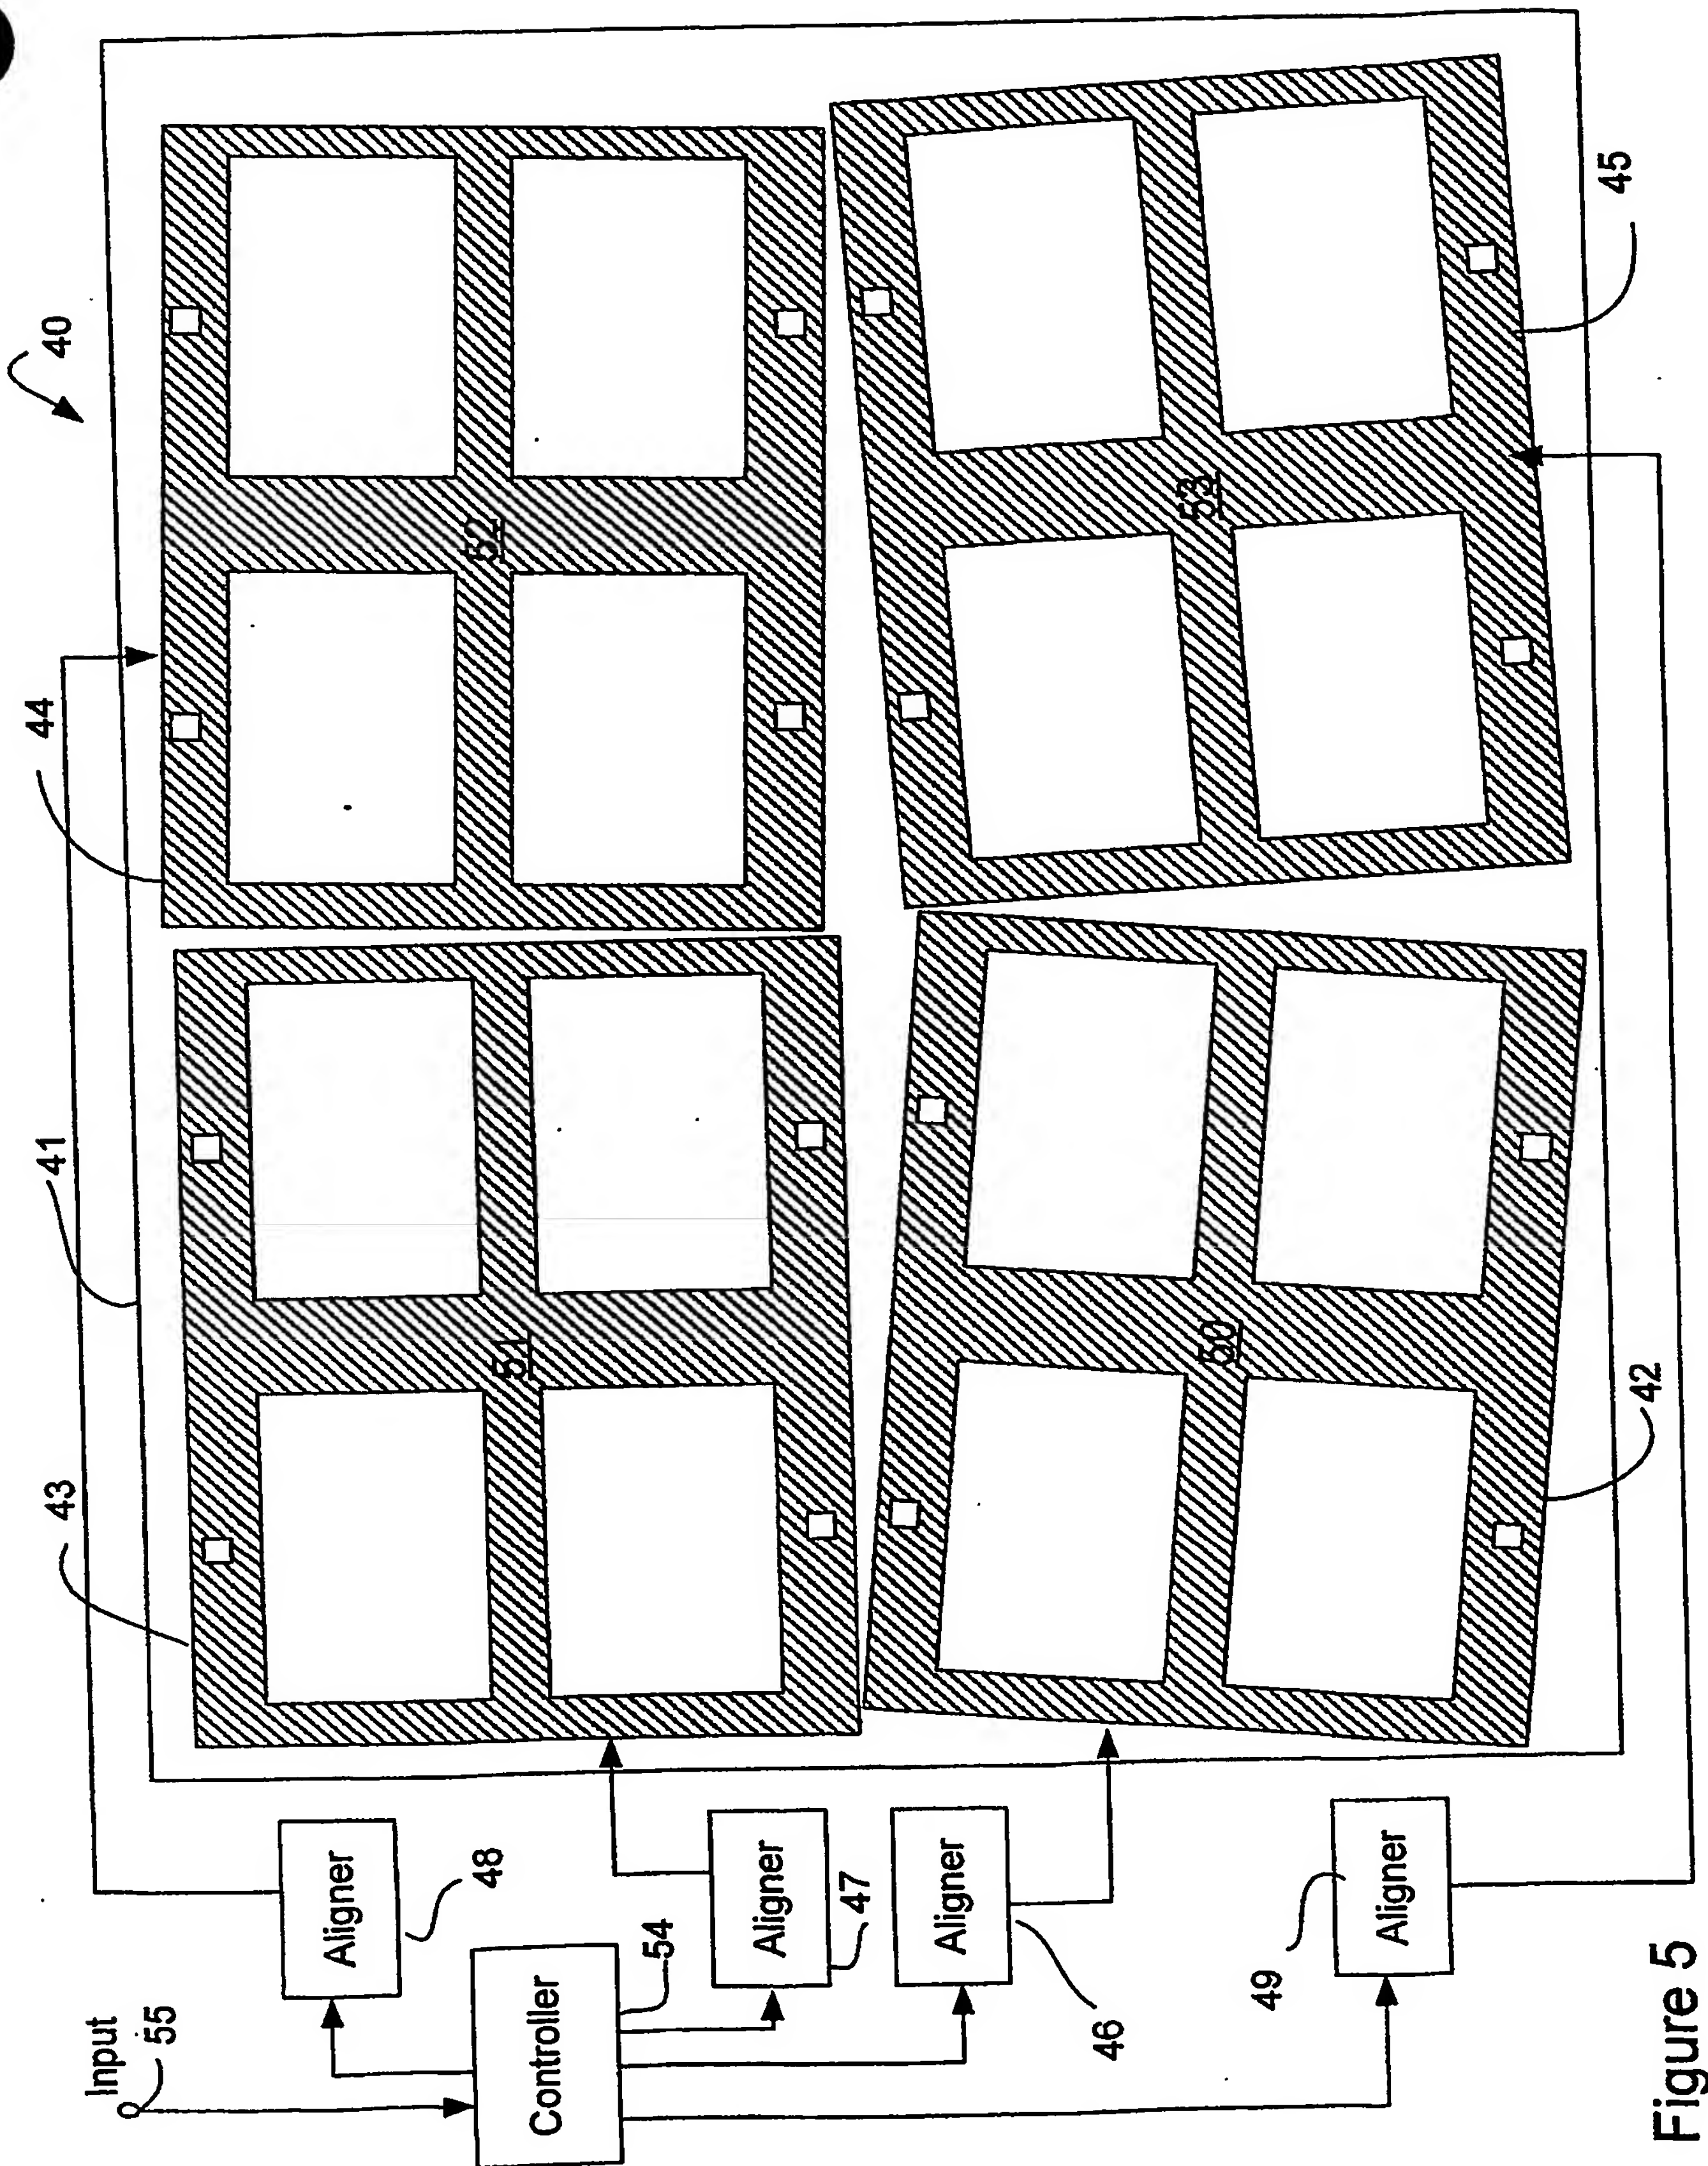


Figure 5

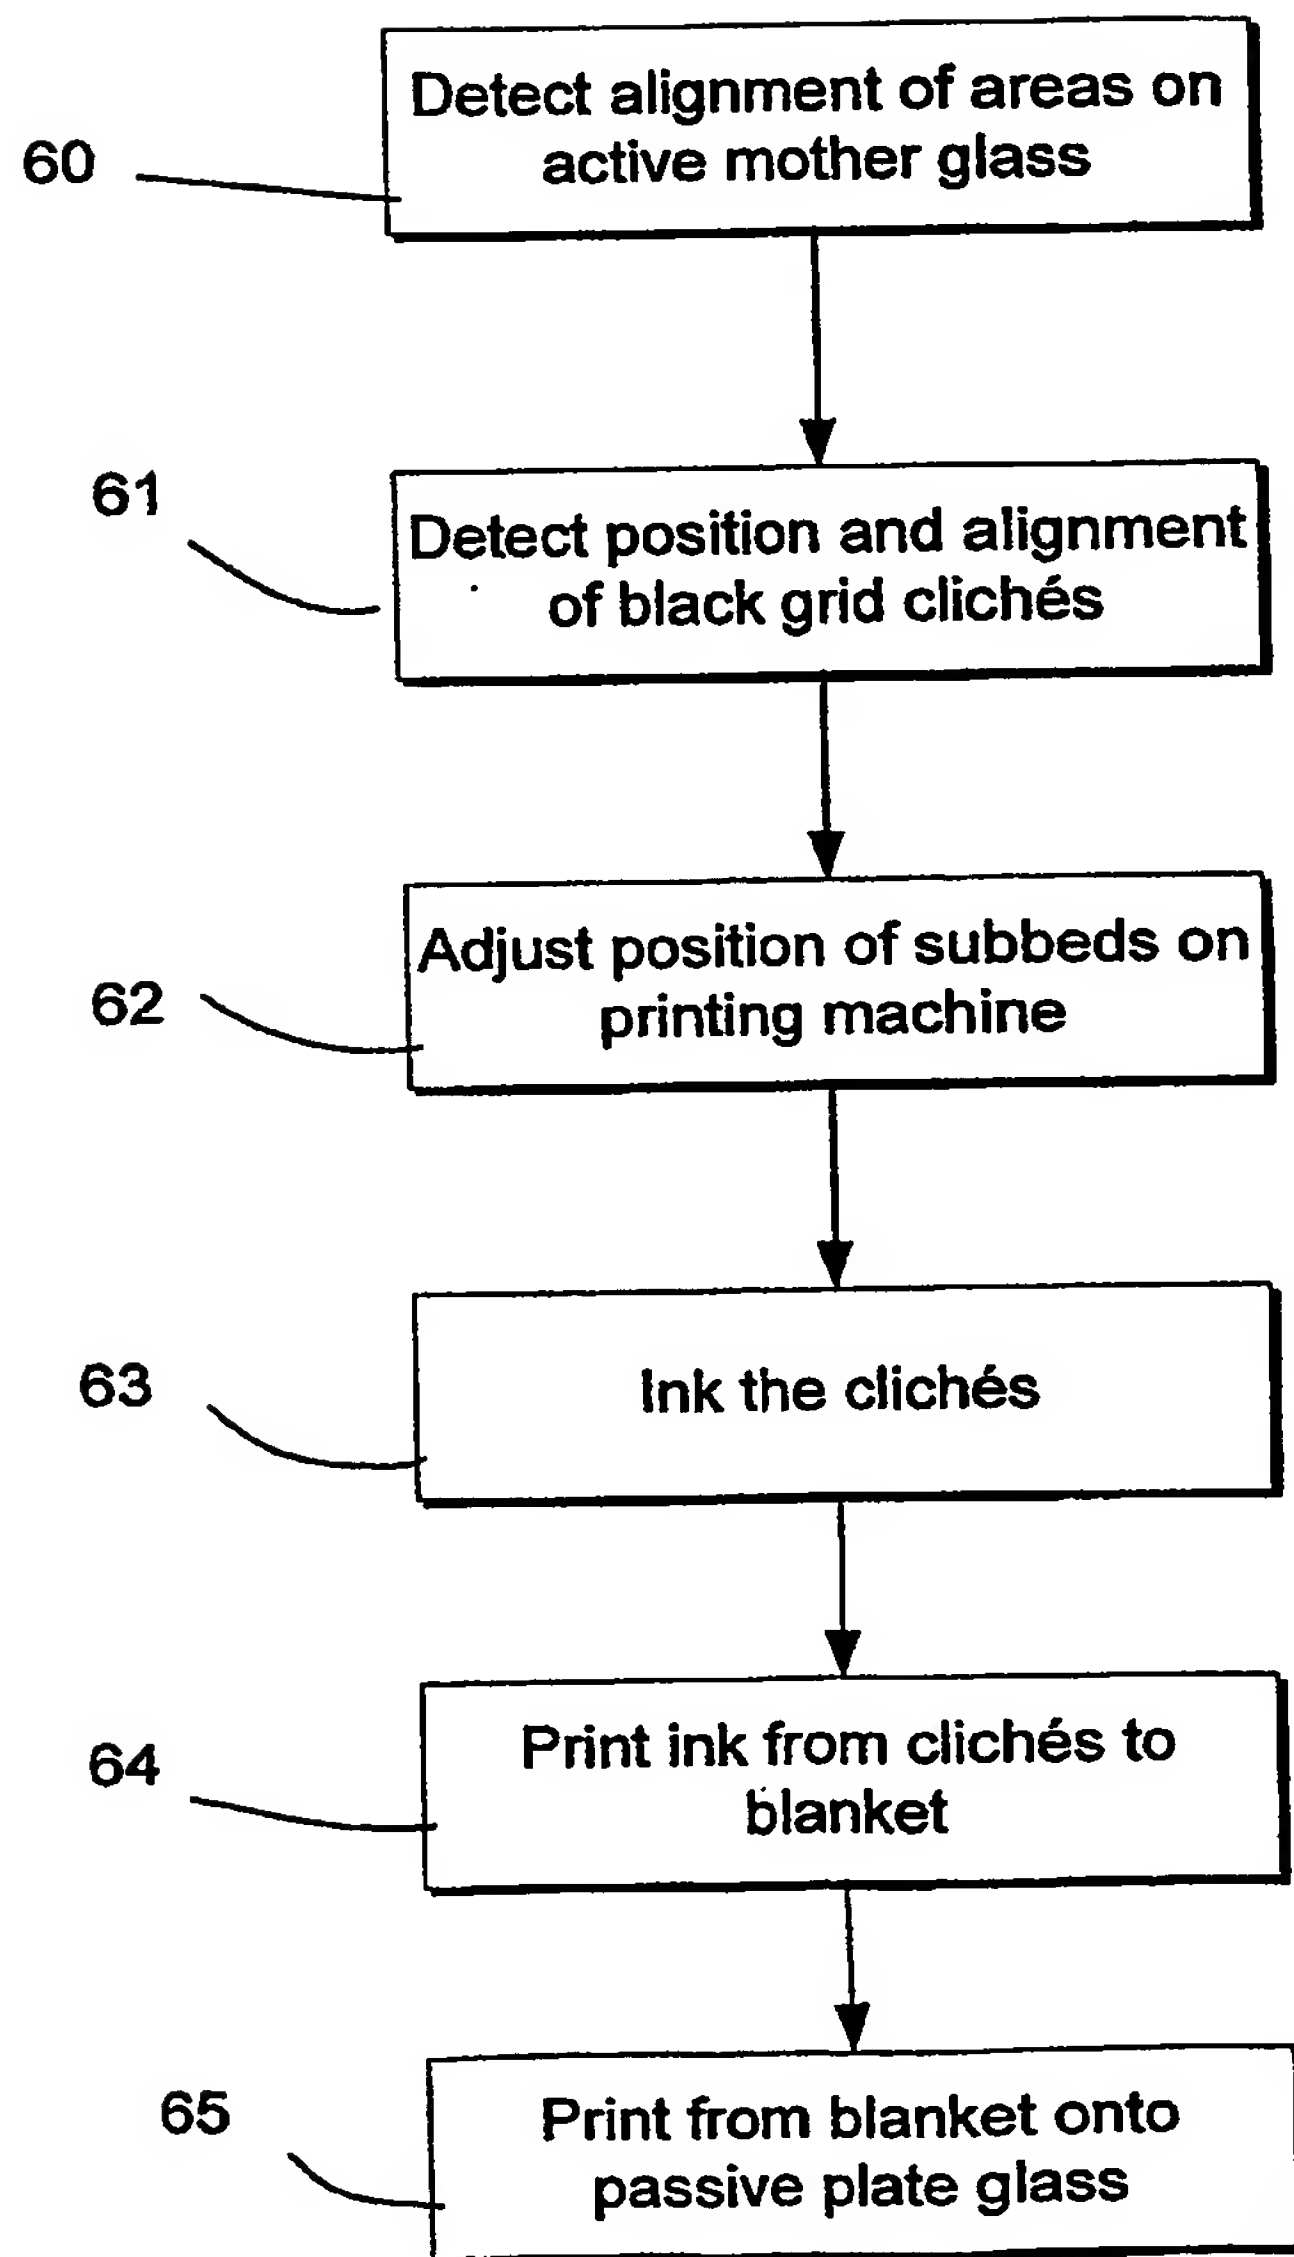


Figure 6

PCT/IB2004/052691



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.